



Reference Tables for Physical Setting/PHYSICS

List of Physical Constants		
Name	Symbol	Value
Universal gravitational constant	G	$6.67 \times 10^{-11} \text{ N}\cdot\text{m}^2/\text{kg}^2$
Acceleration due to gravity	g	9.81 m/s^2
Speed of light in a vacuum	c	$3.00 \times 10^8 \text{ m/s}$
Speed of sound in air at STP		$3.31 \times 10^2 \text{ m/s}$
Mass of Earth		$5.98 \times 10^{24} \text{ kg}$
Mass of the Moon		$7.35 \times 10^{22} \text{ kg}$
Mean radius of Earth		$6.37 \times 10^6 \text{ m}$
Mean radius of the Moon		$1.74 \times 10^6 \text{ m}$
Mean distance—Earth to the Moon		$3.84 \times 10^8 \text{ m}$
Mean distance—Earth to the Sun		$1.50 \times 10^{11} \text{ m}$
Electrostatic constant	k	$8.99 \times 10^9 \text{ N}\cdot\text{m}^2/\text{C}^2$
1 elementary charge <small>proton/electron</small>	e	$\pm 1.60 \times 10^{-19} \text{ C}$
1 coulomb (C)		6.25×10^{18} elementary charges
1 electronvolt (eV)		$1.60 \times 10^{-19} \text{ J}$
Planck's constant	h	$6.63 \times 10^{-34} \text{ J}\cdot\text{s}$
1 universal mass unit (u)		$9.31 \times 10^2 \text{ MeV}$
Rest mass of the electron	m_e	$9.11 \times 10^{-31} \text{ kg}$
Rest mass of the proton	m_p	$1.67 \times 10^{-27} \text{ kg}$
Rest mass of the neutron	m_n	$1.67 \times 10^{-27} \text{ kg}$

Prefixes for Powers of 10		
Prefix	Symbol	Notation
tera	T	10^{12}
giga	G	10^9
mega	M	10^6
kilo	k	10^3
deci	d	10^{-1}
centi	c	10^{-2}
milli	m	10^{-3}
micro	μ	10^{-6}
nano	n	10^{-9}
pico	p	10^{-12}

	Approximate Coefficients of Friction	
	Kinetic	Static
Rubber on concrete (dry)	0.68	0.90
Rubber on concrete (wet)	0.58	
Rubber on asphalt (dry)	0.67	0.85
Rubber on asphalt (wet)	0.53	
Rubber on ice	0.15	
Waxed ski on snow	0.05	0.14
Wood on wood	0.30	0.42
Steel on steel	0.57	0.74
Copper on steel	0.36	0.53
Teflon on Teflon	0.04	



Mechanics

$$\bar{v} = \frac{d}{t}$$

$$a = \frac{\Delta v}{t}$$

$$v_f = v_i + at$$

$$\Delta x = v_i t + \frac{at^2}{2}$$

$$v_f^2 = v_i^2 + 2a\Delta x$$

$$A_y = A \sin \theta$$

$$A_x = A \cos \theta$$

$$F_{net} = ma$$

$$F_f = \mu F_N$$

$$F_g = \frac{Gm_1 m_2}{r^2}$$

$$F_g = mg$$

$$p = mv$$

$$\Delta p = m \Delta v \quad \text{or} \quad P_f - P_i$$

$$p_{before} = p_{after}$$

$$J = F_{net} t = \Delta p$$

$$F_s = kx$$

$$PE_s = \frac{1}{2} kx^2$$

$$F_c = ma_c$$

$$a_c = \frac{v^2}{r}$$

$$\Delta PE = mg\Delta h$$

$$KE = \frac{1}{2} mv^2$$

$$W = Fd \cos \theta = \Delta E_T$$

$$M \quad E_T = PE + KE$$

$$P = \frac{W}{t} = \frac{Fd}{t} = F\bar{v}$$

a = acceleration

a_c = centripetal acceleration

A = any vector quantity

d = displacement or distance

E_T = total energy

F = force

F_c = centripetal force

F_f = force of friction

F_g = weight or force due to gravity

F_N = normal force

F_{net} = net force

F_s = force on a spring

g = acceleration due to gravity or gravitational field strength

G = universal gravitational constant

h = height

J = impulse

k = spring constant

KE = kinetic energy

m = mass

p = momentum

P = power

PE = potential energy

PE_s = potential energy stored in a spring

ME_T = Mechanical Energy (total)

r = radius or distance between centers

t = time interval

v = velocity or speed

\bar{v} = average velocity or average speed

W = work

x = change in spring length from the equilibrium position

Δ = change (final - initial)

θ = angle

μ = coefficient of friction

Electricity

$$F_e = \frac{kq_1q_2}{r^2}$$

$$q = ne$$

$$E = \frac{F_e}{q}$$

$$V = \frac{W}{q} \left(\frac{J}{C} \right)$$

$$I = \frac{q}{t}$$

$$R = \frac{V}{I}$$

$$R = \frac{\rho L}{A}$$

$$P = VI = I^2R = \frac{V^2}{R}$$

$$W = Pt = VIt = I^2Rt = \frac{V^2t}{R}$$


Series Circuits

$$I = I_1 = I_2 = I_3 = \dots$$

$$V = V_1 + V_2 + V_3 + \dots$$

$$R_{eq} = R_1 + R_2 + R_3 + \dots$$

Circuit Symbols



cell



battery



switch



voltmeter



ammeter



resistor



variable resistor



lamp

A = cross-sectional area

E = electric field strength

F_e = electrostatic force

I = current

k = electrostatic constant

L = length of conductor

P = electrical power

q = charge

R = resistance

R_{eq} = equivalent resistance

r = distance between centers

t = time

V = potential difference

W = work (electrical energy)

Δ = change

ρ = resistivity

n = number of elementary particles

Parallel Circuits

$$I = I_1 + I_2 + I_3 + \dots$$

$$V = V_1 = V_2 = V_3 = \dots$$

$$\frac{1}{R_{eq}} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$$

(ρ) Resistivities at 20°C	
Material	Resistivity ($\Omega \cdot m$)
Aluminum	2.82×10^{-8}
Copper	1.72×10^{-8}
Gold	2.44×10^{-8}
Nichrome	$150. \times 10^{-8}$
Silver	1.59×10^{-8}
Tungsten	5.60×10^{-8}

Waves

$$v_{\text{sound}} = 331 + (0.6)(^{\circ}\text{C})$$

$$v = f\lambda$$

$$T = \frac{1}{f}$$

$$\theta_i = \theta_r$$

$$n = \frac{c}{v}$$

$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$

$$\frac{n_2}{n_1} = \frac{v_1}{v_2} = \frac{\lambda_1}{\lambda_2}$$

$$f = \frac{\# \text{ waves}}{\text{time}}$$

c = speed of light in a vacuum

f = frequency

n = absolute index of refraction

T = period

v = velocity or speed

λ = wavelength

θ = angle

θ_i = angle of incidence

θ_r = angle of reflection

Modern Physics

$$E_{\text{photon}} = hf = \frac{hc}{\lambda}$$

$$E_{\text{photon}} = E_i - E_f$$

$$E = mc^2$$

c = speed of light in a vacuum

E = energy

f = frequency

h = Planck's constant

m = mass

λ = wavelength

Geometry and Trigonometry

Rectangle

$$A = bh$$

A = area

b = base

Triangle

$$A = \frac{1}{2}bh$$

C = circumference

h = height

r = radius

Circle

$$A = \pi r^2$$

$$C = 2\pi r$$


Right Triangle

$$c^2 = a^2 + b^2$$


$$\sin \theta = \frac{a}{c}$$

$$\cos \theta = \frac{b}{c}$$

$$\tan \theta = \frac{a}{b}$$

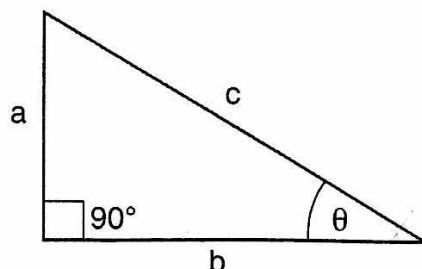

The Electromagnetic Spectrum

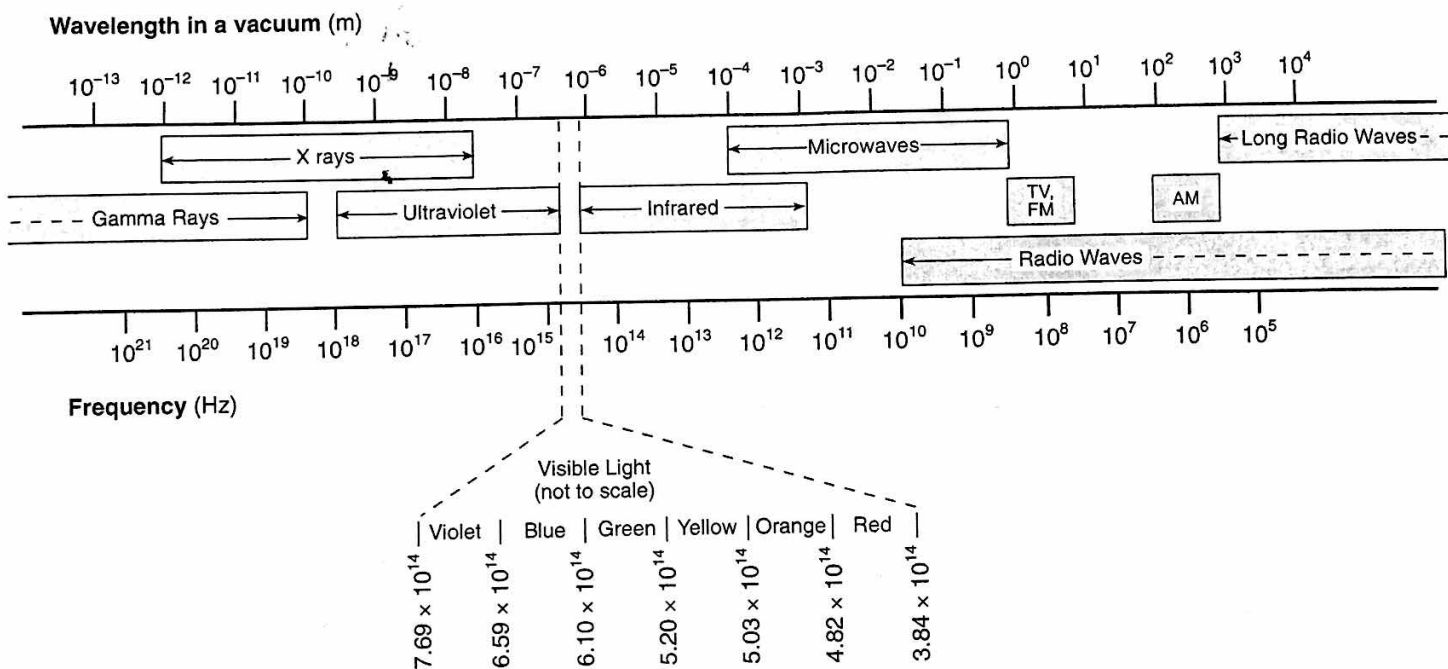

Absolute Indices of Refraction	
$(f = 5.09 \times 10^{14} \text{ Hz})$	
Air	1.00
Corn oil	1.47
Diamond	2.42
Ethyl alcohol	1.36
Glass, crown	1.52
Glass, flint	1.66
Glycerol	1.47
Lucite	1.50
Quartz, fused	1.46
Sodium chloride	1.54
Water	1.33
Zircon	1.92